

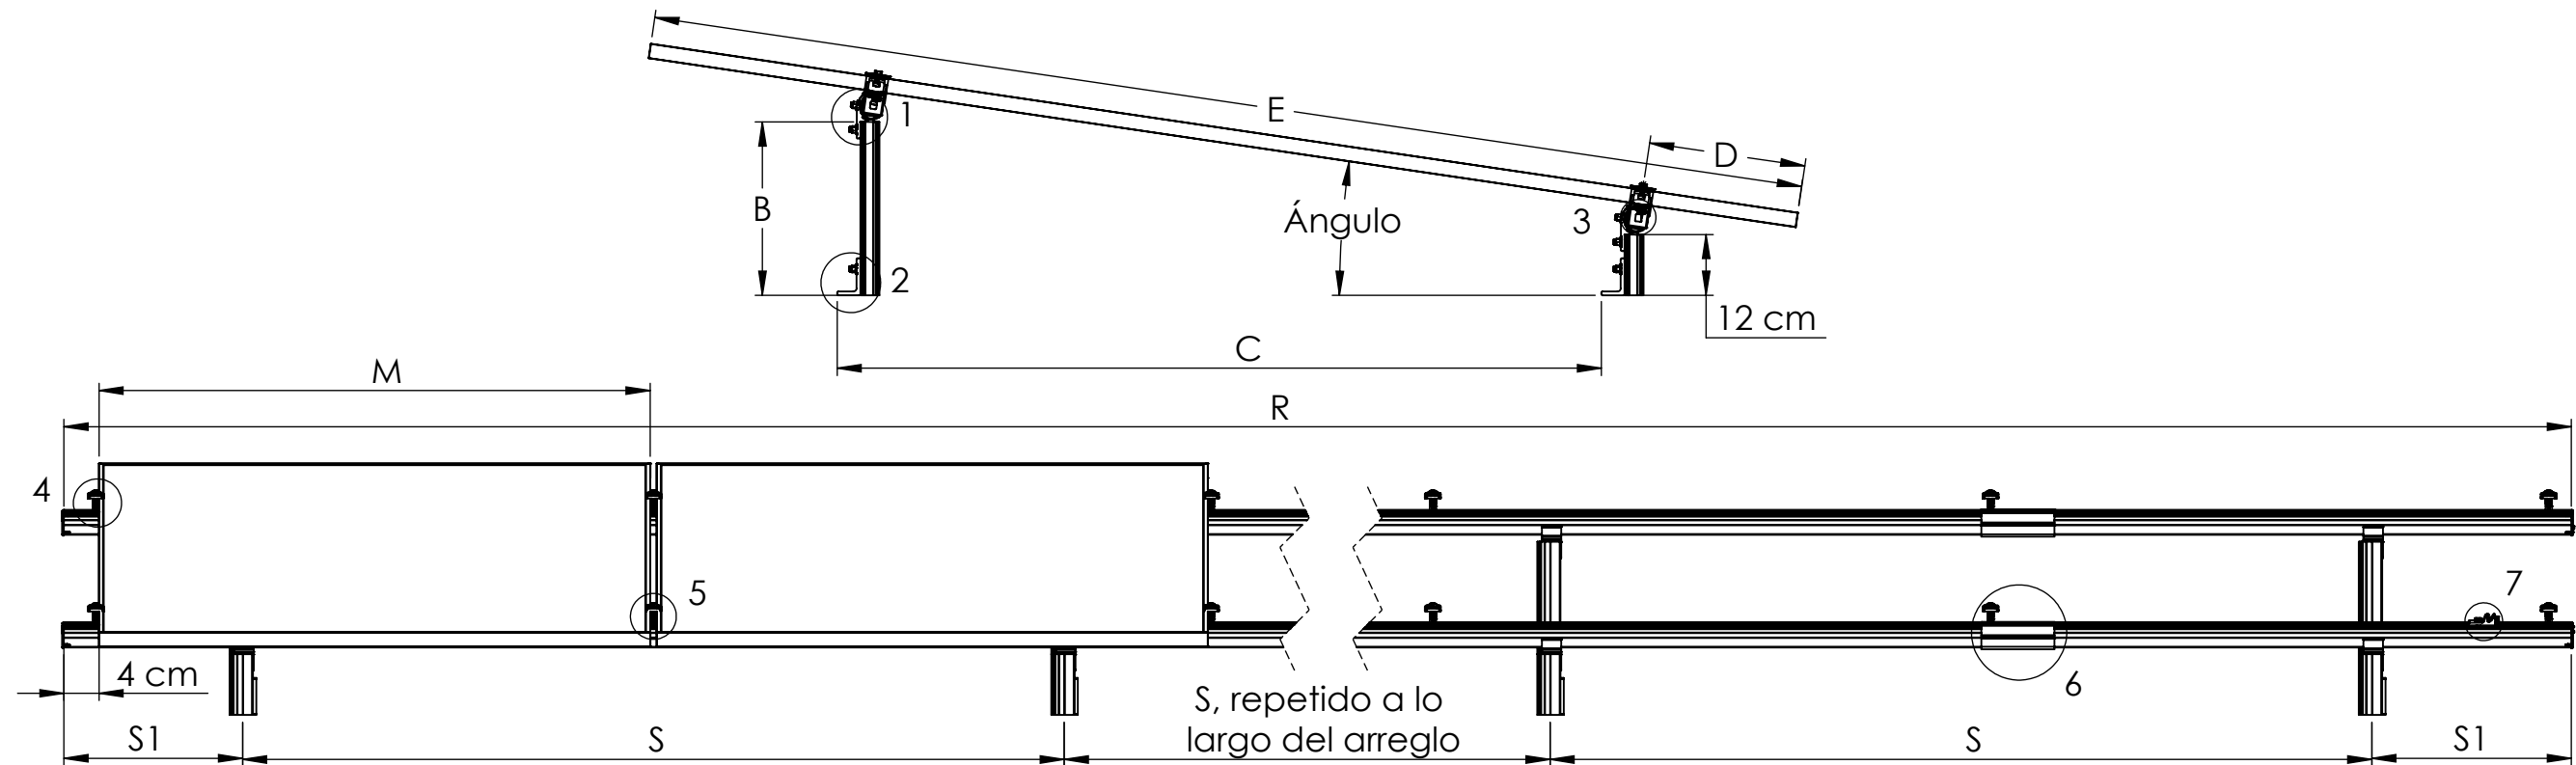


CrossRail 48-X




Simple Knee




L-Foot




Flat EndCap




Cross Clamp  
Posición Final



Cross Clamp  
Posición Media



Rail Connector



K2 Ground Lug

| Número de Kit       | Tamaño de arreglo | Ángulo (°) | B [m] | C [m] | D [m] | E [m] | M [m] | S [m] | S1 [m] | R [m]        | Cantidad de soportes por fila de riel |
|---------------------|-------------------|------------|-------|-------|-------|-------|-------|-------|--------|--------------|---------------------------------------|
| K2-ST-2P-1303-24-R  | 1x2               | 24         | 0.77  | 1.46  | 0.39  | 2.384 | 1.303 | 0.72  | 0.27   | 2.70         | 4                                     |
| K2-ST-3P-1303-24-R  | 1x3               | 24         | 0.77  | 1.46  | 0.39  | 2.384 | 1.303 | 0.70  | 0.27   | 4.02         | 6                                     |
| K2-ST-4P-1303-24-R  | 1x4               | 24         | 0.77  | 1.46  | 0.39  | 2.384 | 1.303 | 0.69  | 0.27   | 4.70+0.631   | 8                                     |
| K2-ST-5P-1303-24-R  | 1x5               | 24         | 0.77  | 1.46  | 0.39  | 2.384 | 1.303 | 0.76  | 0.27   | 4.70+1.947   | 9                                     |
| K2-ST-6P-1303-24-R  | 1x6               | 24         | 0.77  | 1.46  | 0.39  | 2.384 | 1.303 | 0.74  | 0.27   | 4.70+3.263   | 11                                    |
| K2-ST-7P-1303-24-R  | 1x7               | 24         | 0.77  | 1.46  | 0.39  | 2.384 | 1.303 | 0.80  | 0.27   | 4.70+4.579   | 12                                    |
| K2-ST-8P-1303-24-R  | 1x8               | 24         | 0.77  | 1.46  | 0.39  | 2.384 | 1.303 | 0.77  | 0.27   | 4.7(2)+1.195 | 14                                    |
| K2-ST-9P-1303-24-R  | 1x9               | 24         | 0.77  | 1.46  | 0.39  | 2.384 | 1.303 | 0.76  | 0.27   | 4.7(2)+2.511 | 16                                    |
| K2-ST-10P-1303-24-R | 1x10              | 24         | 0.77  | 1.46  | 0.39  | 2.384 | 1.303 | 0.79  | 0.27   | 4.7(2)+3.827 | 17                                    |



K2 Systems  
Prolongación Avenida El Colli  
191, Int.17  
Zapopan, Jalisco

Title:

Simple Tilt, módulos de 1.303 m de ancho  
a 24°, vientos menores a 200 km/h

CrossRail Dual Rail - Kits Disponibles

Kits para módulos de 1303mm. Vientos hasta 200km/h

| Landscape Tilt                           | Tamaño de arreglo por kit | 1x2                | 1x3                | 1x4                | 1x5                | 1x6                |
|------------------------------------------|---------------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| Descripción                              | Modelo                    | K2-ST-2P-1303-24-R | K2-ST-3P-1303-24-R | K2-ST-4P-1303-24-R | K2-ST-5P-1303-24-R | K2-ST-6P-1303-24-R |
| CrossRail 48-X, 4.70m, Mill              | K2-CROSS RAIL 48X-4700    | 2                  | 3                  | 4                  | 5                  | 6                  |
| RailConn CR 48-X, 48-XL Struct Set, Mill | K2-RAIL CONN-48X          | 0                  | 0                  | 2                  | 2                  | 2                  |
| L-Foot Slotted Set, Mill                 | K2-L-FOOT                 | 8                  | 12                 | 16                 | 18                 | 22                 |
| Simple Tilt Knee, Set                    | K2-ST KNEE                | 8                  | 12                 | 16                 | 18                 | 22                 |
| K2 Cross Clamp Set, Mill                 | K2-CROSS CLAMP            | 6                  | 8                  | 10                 | 12                 | 14                 |
| CrossRail Flat EndCap, CR 48-X, 48-XL    | K2-ENDCAP-48X             | 4                  | 4                  | 4                  | 4                  | 4                  |
| K2 Ground Lug, 13mm, Hex Set             | K2-GL                     | 1                  | 1                  | 1                  | 1                  | 1                  |

| Landscape Tilt                           | Tamaño de arreglo por kit | 1x7                | 1x8                | 1x9                | 1x10                |
|------------------------------------------|---------------------------|--------------------|--------------------|--------------------|---------------------|
| Descripción                              | Modelo                    | K2-ST-7P-1303-24-R | K2-ST-8P-1303-24-R | K2-ST-9P-1303-24-R | K2-ST-10P-1303-24-R |
| CrossRail 48-X, 4.70m, Mill              | K2-CROSS RAIL 48X-4700    | 7                  | 8                  | 9                  | 9                   |
| RailConn CR 48-X, 48-XL Struct Set, Mill | K2-RAIL CONN-48X          | 2                  | 4                  | 4                  | 4                   |
| L-Foot Slotted Set, Mill                 | K2-L-FOOT                 | 24                 | 28                 | 32                 | 34                  |
| Simple Tilt Knee, Set                    | K2-ST KNEE                | 24                 | 28                 | 32                 | 34                  |
| K2 Cross Clamp Set, Mill                 | K2-CROSS CLAMP            | 16                 | 18                 | 20                 | 22                  |
| CrossRail Flat EndCap, CR 48-X, 48-XL    | K2-ENDCAP-48X             | 4                  | 4                  | 4                  | 4                   |
| K2 Ground Lug, 13mm, Hex Set             | K2-GL                     | 1                  | 1                  | 1                  | 1                   |



K2 Systems  
Prolongación Avenida El Colli  
191, Int.17  
Zapopan, Jalisco

Title:  
Simple Tilt, módulos de 1.303 m de ancho  
a 24°, vientos menores a 200 km/h